

Aqua-Life

PRODUCTS BioStream Models



BP60



Optional remote control provides full control from 275m (900ft) away.



Intake Devices

Increases fish safety, Decrease setup times, Allows for low water pumping



Stationary Bar Grader & Counter



Tank Bottom Suction Cone

Ideal for low water pumping or tank draining.



Transition Suction Cone


Applications that require pumping in a lower water application.



Boxed Inverted Chute

Aids in-line purging, Light weight, Quick setup, Added control.

**Control and versatility
with industry leading
performance.**

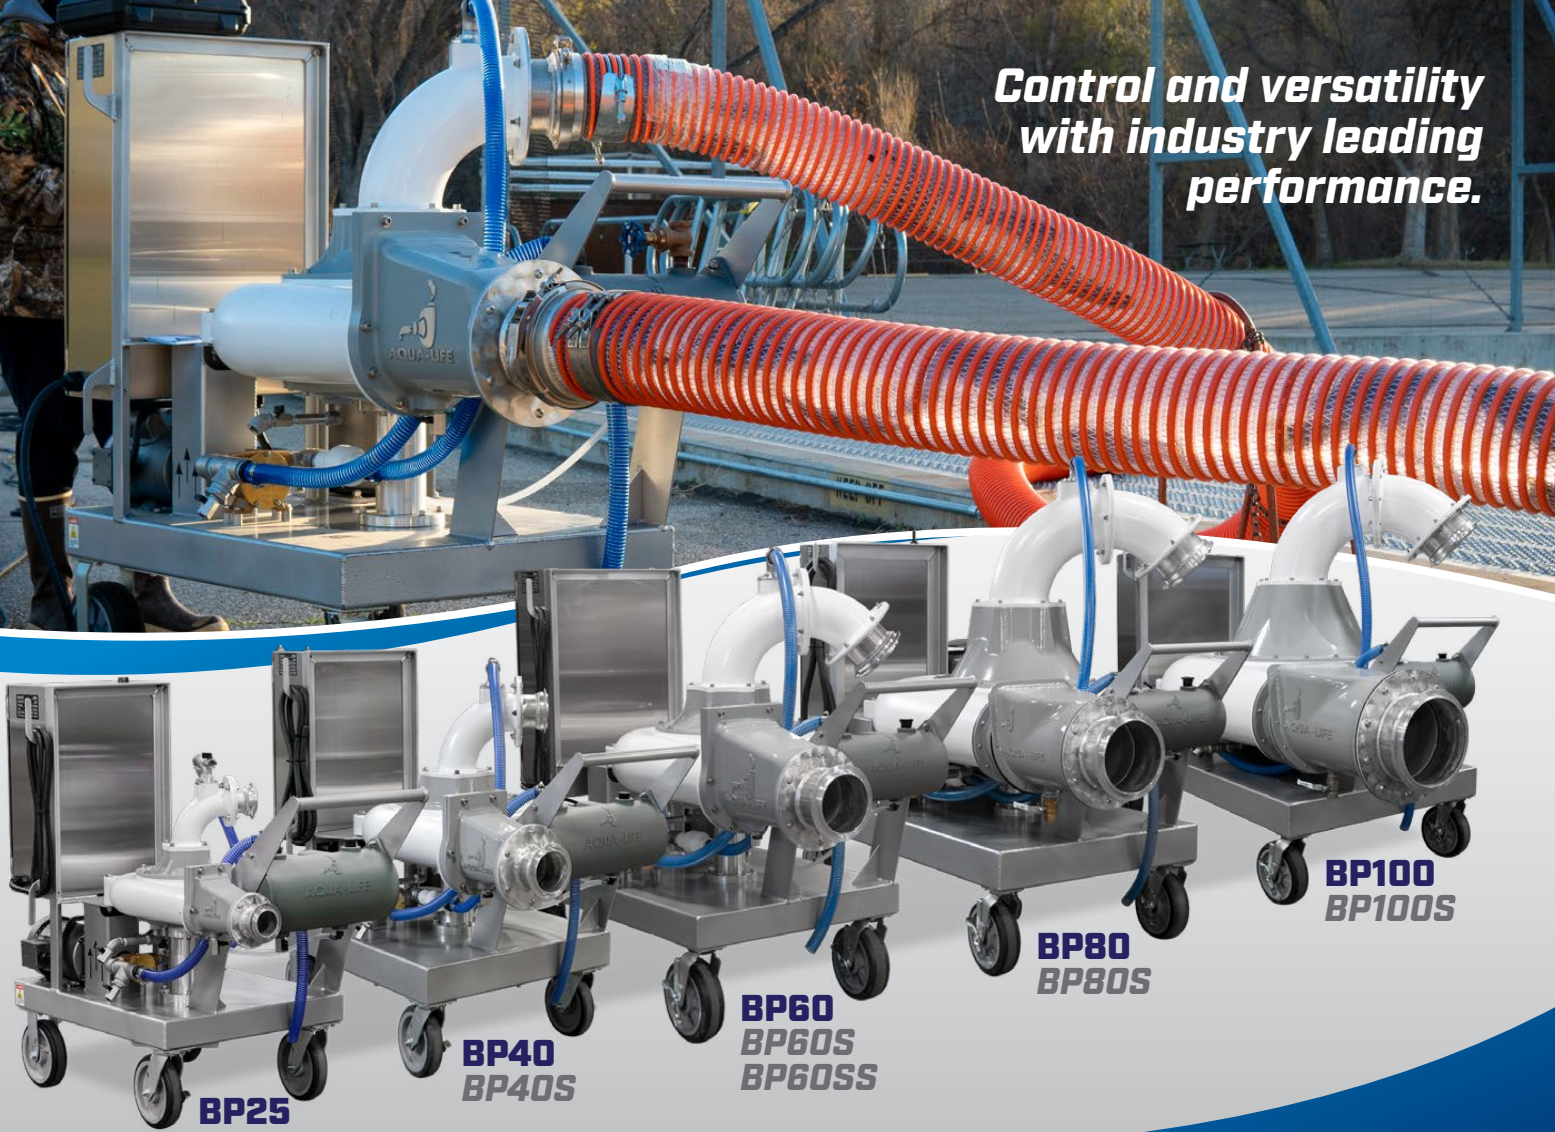

BP25

**BP40
BP40S**

**BP60
BP60S
BP60SS**

**BP80
BP80S**

**BP100
BP100S**

	BP25	BP40 - S	BP60 - S - SS	BP80 - S	BP100 - S
Inlet/Outlet Size	2.5 in (65mm)	4 in (100mm)	6 in (150mm)	8in (200mm)	10in (250mm)
Main Pump Drive	2hp	3hp & 7.5hp	5hp - 7.5hp - 10hp	15hp & 20hp	25hp & 30hp
Priming Pump Drive	1hp	1hp	1.5 hp	1.5hp	1.5hp
Fish Pumping Cap	4 t/hr	8 t/hr	16 t/hr	24 t/hr	55 t/hr
Pump Output Max	170 gpm	480-800 gpm	800-1200-1500 gpm	2400-2700 gpm	3300-3900 gpm
Maximum Head	24.6 ft (7.5m)	29.5-46 ft (9-14m)	29.5-36-46 ft (9-11-14m)	29.5-36 ft (9-11m)	29.5-36 ft (9-11m)
Maximum Distance	300m	800m-3000m	600m-1500m-2700m	800m-2000m	700m-1500m
Maximum Avg Fish Size	95g	300g	600g	1.5kg	3.0kg
Pump Weight	315lbs (142kg)	425lbs (193kg)	620lbs (280kg)	1000lbs (452kg)	1500lbs (680kg)

*limits and specifications vary depending on the application, species and setup. Specifications cannot be achieved simultaneously.



MAGIC VALLEY HELI-ARC & MFG., INC.

198 Freightway Street • P.O. Box 511 • Twin Falls, Idaho 83303-0511
USA Phone: (208) 733-0503 • USA Fax: (208) 733-0544

/AqualifeProductsUSA /AqualifeGraphics

/AqualifeGraphic

www.AquaLifeProducts.com

info@aqualifeproducts.com